

LED 형광램프



GT1200 13W | 15W | 17W | 18W | 22W | 22W(보급형)



- **호환 가능 소켓** 기존 T10, T8 BASE / G13소켓 규격의 형광등기구와 호환 가능
- **안전성 우수** 절연방식의 SMPS를 적용
- **제품의 슬림화** 경량화된 제품으로 시공성 우수



	13W	15W	17.4W	18W	22W	22W(보급형)
무게 (g)	300	300	300	300	300	300
소비전력 (W)	13	15	17.4	18	22	22
전압 (VAC)	220	220	220	220	220	220
색온도 (K)	5,700	5,700	5,700	5,700	5,700	5,700
총광속 (lm)	2,392	2,383	2,401	2,430	2,736	2,800
광효율 (lm/W)	184	158.9	138	135	124.4	127
역률	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
연색성 (Ra)	80	80	80	80	80	80
인증	KC, 고효율	KC, 고효율	KC, 고효율	KC, 고효율	KC, 고효율	KC

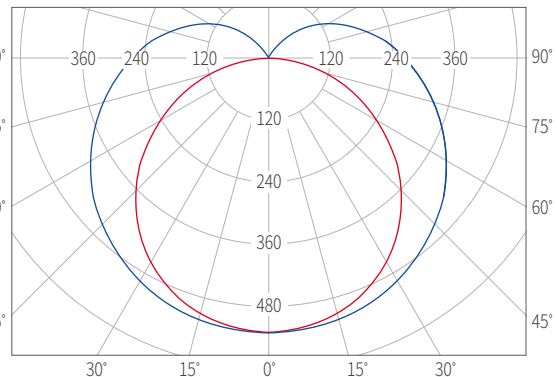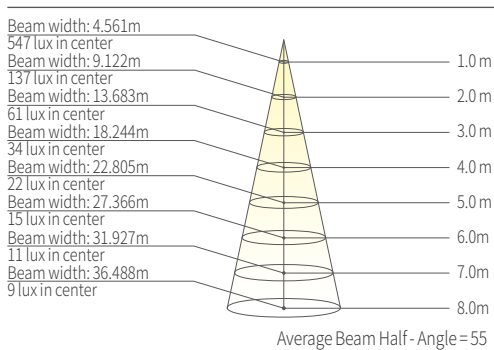

동반상생 협력제품